
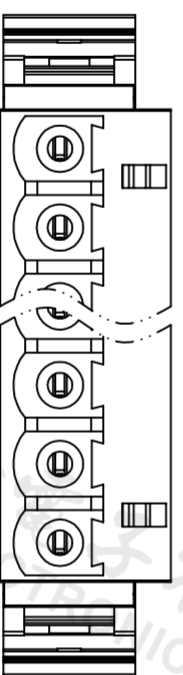
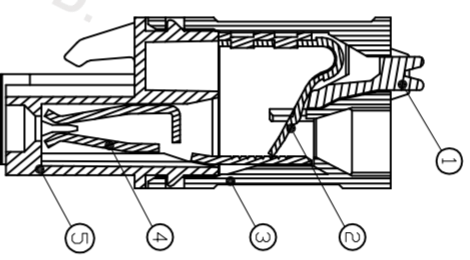
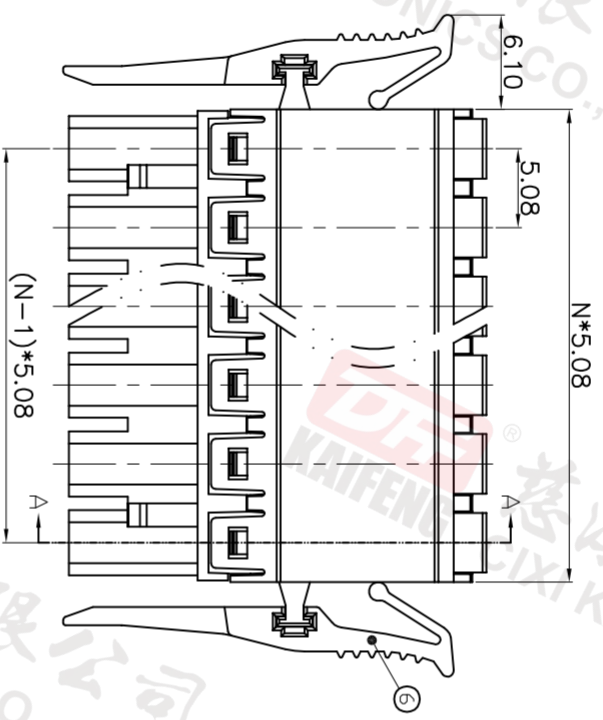
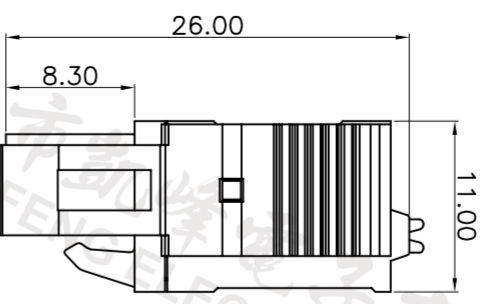


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2021.8.25	ZHANG	JIN

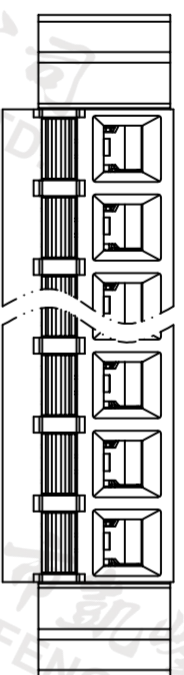

• Material

- ①Button : PA66, UL94V-0
- ②Reed : Stainless steel
- ③Housing : PA66, UL94V-0
- ④Contact : Copper alloy, Tin plated
- ⑤Cover : PA66, UL94V-0
- ⑥Clip : PA66, UL94V-0

• Electrical


- UL IEC
- Rated voltage : 300V 300V
- Rated current : 12A 12A
- Contact resistance : 20mΩ(Max)
- Insulation resistance: 500MΩ/DC500V
- Withstanding Voltage : AC2500V/1min
- Wire range: 24-14AWG 0.2-2.5mm²

• Mechanical

- Operating temperature: -40℃~+105℃
- Soldering temperature: 250℃±5/5sec
- Strip length: 11-12mm

• Conform to REACH and RoHS

HOW TO ORDER
2KF012K-5.08-XXP-1 X-XXXXX

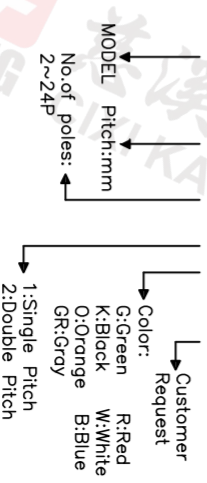

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
>6	>30	□
~6	~30	□
~10	~60	□
~24	~100	□
±0.15 ±0.20	±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	A4	TITLE	2KF012K-5.08-XXP-1X
SCALE	1:1	SHEET	1/1	UNIT	mm
DRAWING NO.	W10002982	SERIES	2KF012K		

慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD