



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2021.8.25	ZHANG	JIN

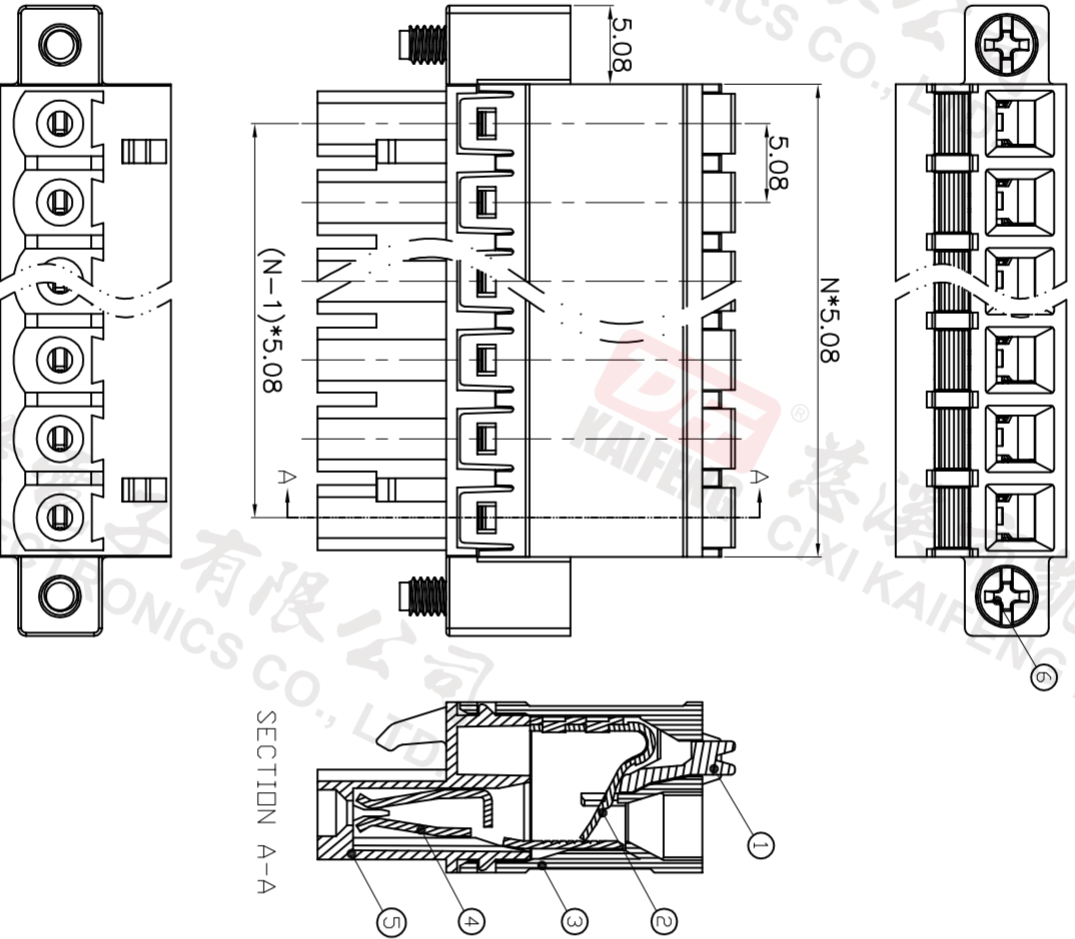

- Material
 - ØButton : PA66, UL94V-0
 - ØReed : Stainless steel
 - ØHousing : PA66, UL94V-0
 - ØContact : Copper alloy, Tin plated
 - ØCover : PA66, UL94V-0
 - ØScrew : M2.5 steel, Zinc plated
- Electrical

UL	IEC
Rated voltage : 300V	300V
Rated current : 12A	12A
Contact resistance : 20mΩ(Max)	
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2500V/1min	
Wire range: 24-14AWG 0.2-2.5mm ²	
- Mechanical
 - Operating temperature: -40°C ~ $+105^{\circ}\text{C}$
 - Soldering temperature: $250^{\circ}\text{C} \pm 5/5\text{sec}$
 - Strip length: 11-12mm
 - Torque: 0.2N.m
- Conform to REACH and RoHS

HOW TO ORDER
2KF012M-5.08-XXP-1 X-XXXX

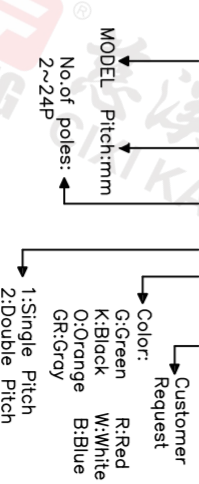

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0 ~ >6	>10 ~ >30	□	mm	2KF012M-5.08-XXP-1X
6 ~ 10	30 ~ 60	□	mm	
10 ~ 24	60 ~ 100	□	mm	
±0.15 ±0.20	±0.30 ±0.50	□	mm	
	±0.70 ±1.00 ±1.30	□	mm	
	±2'	□	mm	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1 SHEET
DRAWING NO.	W10002972

慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

A B C D E F G H 1 2 3 4 5 6 7 8