
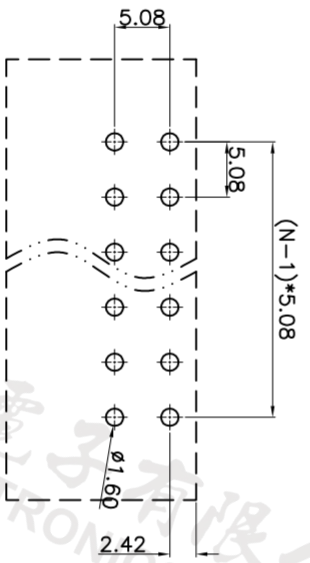

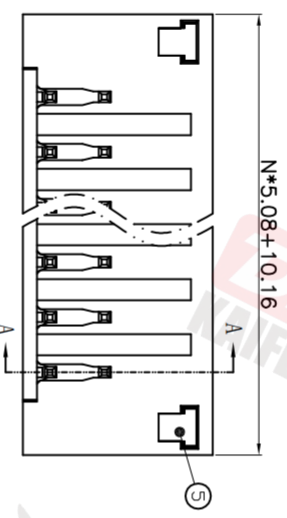
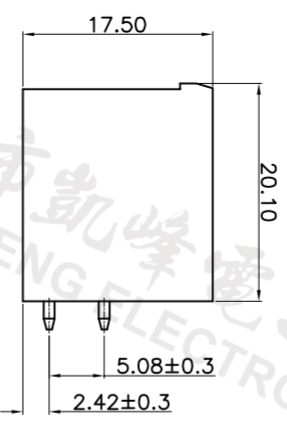


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2021.8.21	ZHANG	JIN

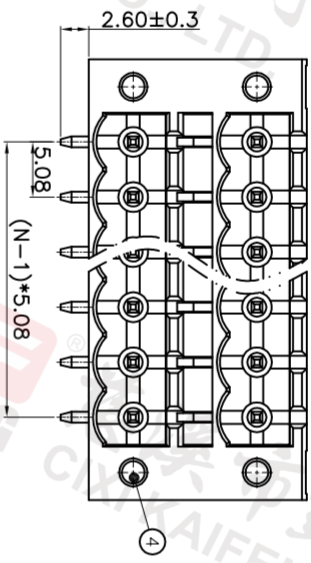

P.C.B. LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
>6	>30	
~	~	
6	60	
10	100	
~	~	
24	150	
±0.15	±0.30	±2°
±0.20	±0.30	
±0.30	±0.50	
±0.70	±1.00	
±1.30	±1.30	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1/1
DRAWING NO.	W10002992

- Material
 - ①Housing : PA66, UL94V-0
 - ②Pin header : Copper alloy, Tin plated
 - ③Cover : PA66, UL94V-0
 - ④Nut : M2.5 steel, Zinc plated
 - ⑤Plug : PA66, UL94V-0

- Electrical

UL	IEC
Rated voltage : 300V	300V
Rated current : 12A	12A
Contact resistance : 20mΩ(Max)	
Insulation resistance : 500MΩ/DC500V	
Withstanding Voltage : AC2500V/1min	

- Mechanical
 - Operating temperature: -40°C~+105°C
 - Soldering temperature: 250°C±5/5sec

• Conform to REACH and RoHS

HOW TO ORDER
 2KF012RM-5.08-2*XXP-1 X-XXXXX

MODEL Pitch:mm No. of poles: 2~24P

Color: Customer Request

G:Green	R:Red
K:Black	W:White
O:Orange	B:Blue
GR:Grey	

1:Single Pitch
 2:Double Pitch

PROJECTION	TITLE
UNIT	mm
SHEET SIZE	A4
SERIES	2KF012RM

2KF012RM-5.08-2*XXP-1X

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD



慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD