
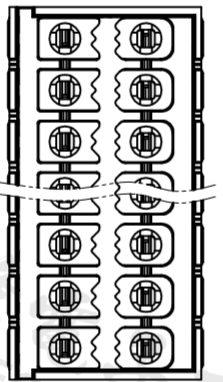
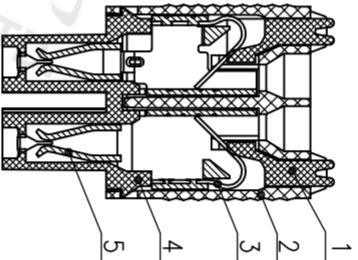
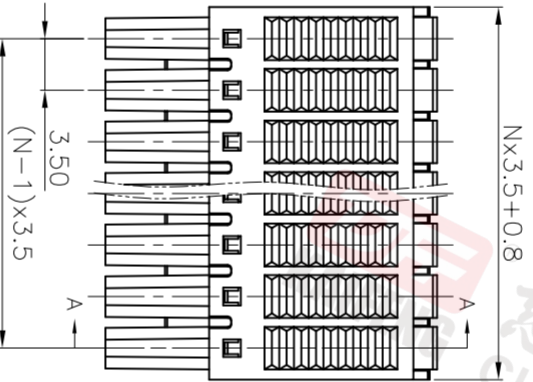
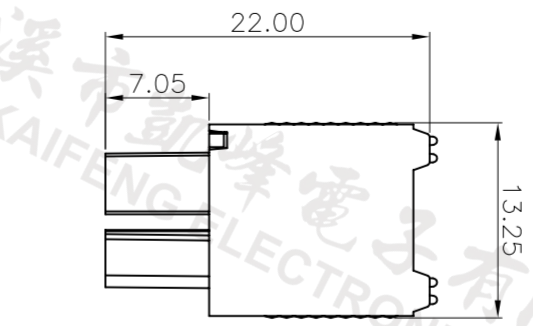


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2022.11.3	ZHANG	JIN

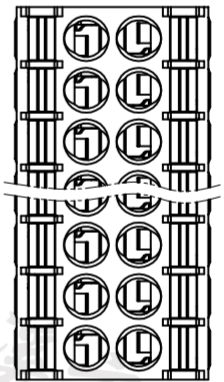

- Material
- ①Housing : POM
- ②Housing : PA66, UL94V-0
- ③Reed : Stainless steel
- ④Cover : PA66, UL94V-0
- ⑤Contact : Copper alloy, Tin plated


- Electrical

UL IEC
 Rated voltage : 300V 250V
 Rated current : 8A 8A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
 Wire range: 26-16AWG 0.2-1.5mm²

- Mechanical
- Operating temperature: -40℃~+105℃
 Soldering temperature: 250℃±5/5sec
 Strip length: 10mm

- Conform to REACH and RoHS

HOW TO ORDER
 2KF014-3.5-2*XXP-1 X-XXXXX

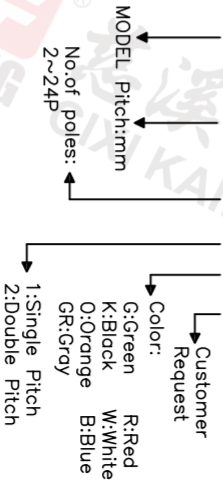

Pitch range	Nominal dimension range	PROJECTION
>0	>10	0.1/10
~	~	□
6	10	24
±0.15	±0.20	±0.30
±0.30	±0.50	±0.70
±1.00	±1.30	±2*

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	TITLE
SCALE	1:1	SHEET	1/1
DRAWING NO.	W10003602	A4	2KF014-3.5-2*XXP-1X
		SERIES	2KF014

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

