
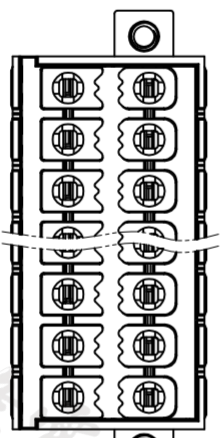
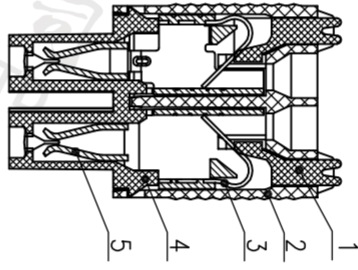
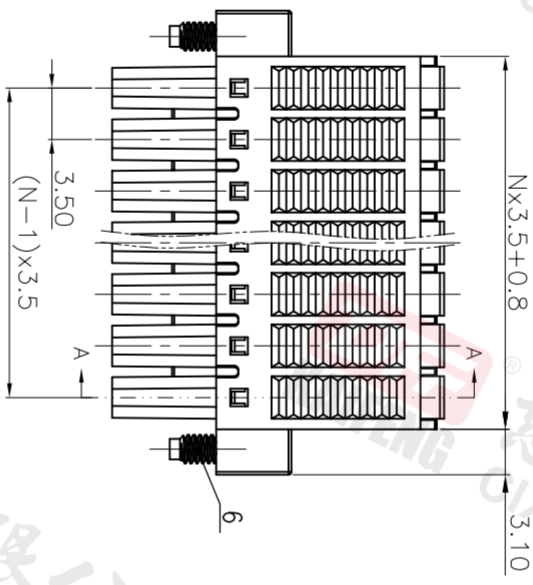
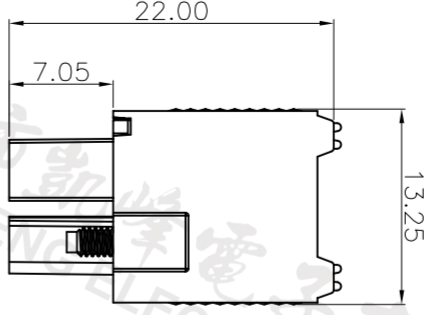


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2022.11.3	ZHANG	JIN

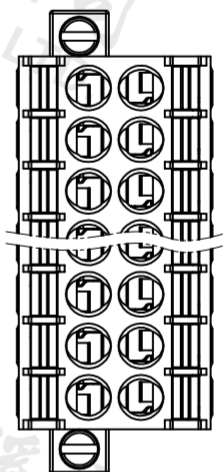


- Material
 - ①Button : POM
 - ②Housing : PA66, UL94V-0
 - ③Reed : Stainless steel
 - ④Cover : PA66, UL94V-0
 - ⑤Contact : Copper alloy, Tin plated
 - ⑥Screw : M2.0 Steel, Zinc plated

- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 8A 8A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 26-16AWG 0.2-1.5mm²

- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ±5 / 5sec
 - Strip length: 10mm

• Conform to REACH and RoHS

HOW TO ORDER
2KF014M-3.5-2*XXP-1 X-XXXXX

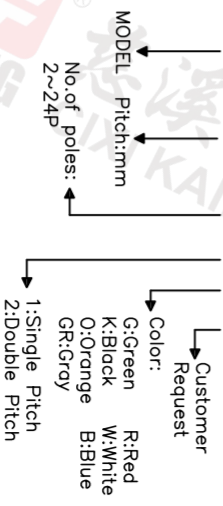

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	~30	□
~10	~60	□
~24	~100	□
±0.15 ±0.20	±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	TITLE
SCALE	1:1	A4	2KF014M-3.5-2*XXP-1X
DRAWING NO.	W10003582		

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

