
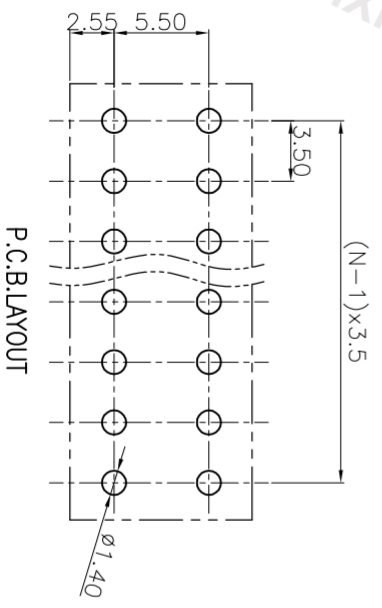

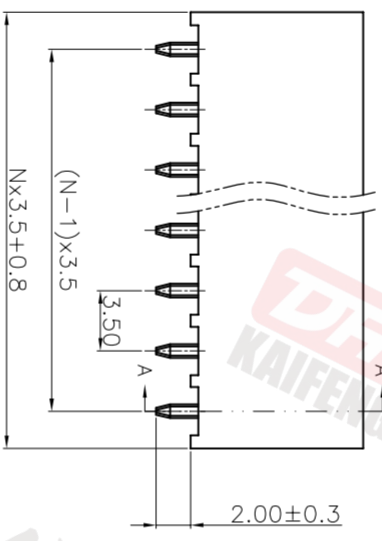
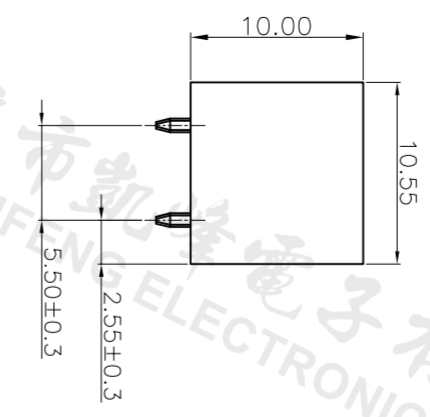


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.4.26	ZHANG	JIN

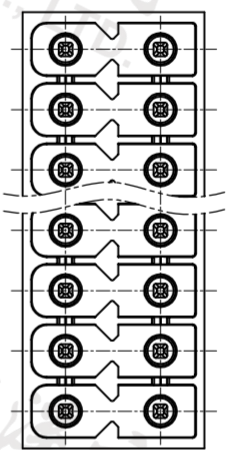

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>6	~	mm	2KF014V-3.5-2*XXP-1X
>6	>10	~	mm	
6	~	~	mm	
~	10	~	mm	
~	24	~	mm	
±0.15	±0.20	±0.30	±0.30	±2°
±0.30	±0.30	±0.50	±0.70	±1.00
±1.00	±1.30	±1.50	±2.00	±2.50

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	SERIES
SCALE	1:1	SHEET	2KF014V
DRAWING NO.	W10004082	1/1	

- Material
 ØHousing : PA9T, UL94V-0
 ØPin header: Copper alloy, Tin plated
- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 8A 8A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
- Mechanical
 Operating temperature: -40°C ~ +130°C
 Soldering temperature: 250°C ± 5/5sec
- Conform to REACH and RoHS

HOW TO ORDER
 2KF014V-3.5-2*XXP-1 X-XXXXX

MODEL Pitch:mm
 No. of poles: 2~24P

Customer Request
 Color:
 R:Red
 G:Green
 K:Black
 W:White
 O:Orange
 B:Blue
 GR:Gray

1:Single Pitch
 2:Double Pitch

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD