

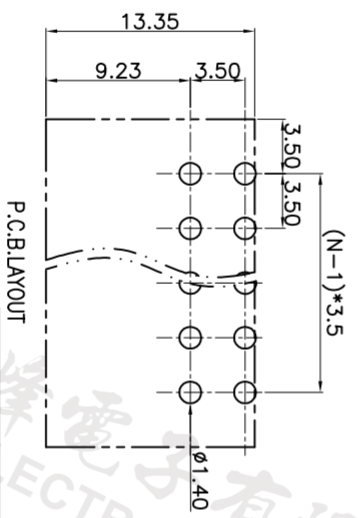
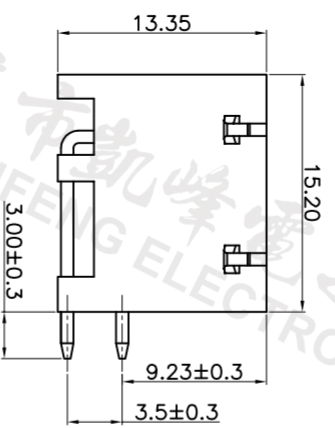




REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.8.26	ZHANG	JIN

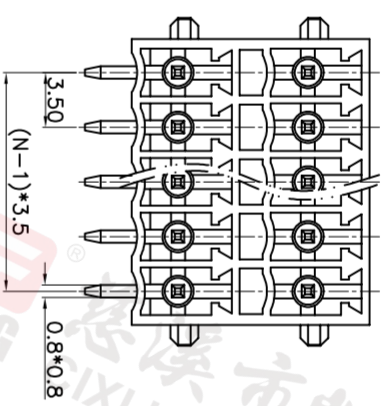

- Material  
 ○Housing : PA66, UL94V-0  
 ○Pin header : Copper alloy, Tin plated
- Electrical  
 UL IEC  
 Rated voltage : 300V 250V  
 Rated current : 8A 7A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC1500V/1min
- Mechanical  
 Operating temperature: -40°C~+105°C  
 Soldering temperature: 250°C±5/5sec
- Conform to REACH and RoHS

**HOW TO ORDER**  
 KF12EKN-R-3.5-2\*XXP-1 X-XXXXX

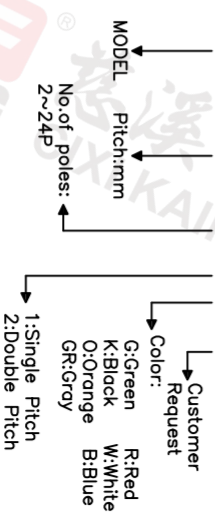

Pitch range	Nominal dimension range	PROJECTION
>0	>0	—
>6	>30	□
~	~	□
6	60	□
10	100	□
~	~	□
24	150	□
±0.15	±0.30	□
±0.20	±0.50	□
±0.30	±0.70	□
±1.00	±1.00	□
±1.30	±1.30	□
	±2'	□

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	W10005162

TITLE	PROJECTION	UNIT	SHEET SIZE	SERIES
KF12EKN-R-3.5-2*XXP-1X-RK	1:1	mm	A4	KF12EKN-R

**DFE** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD

