
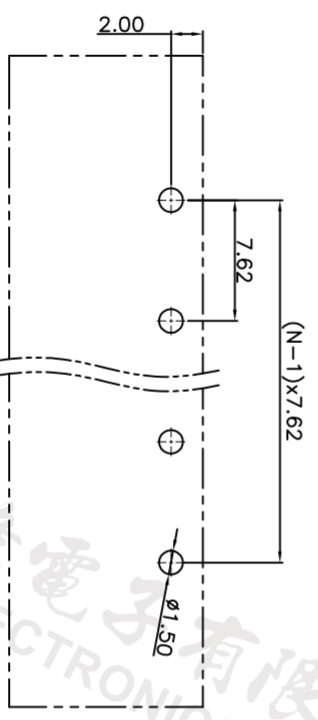

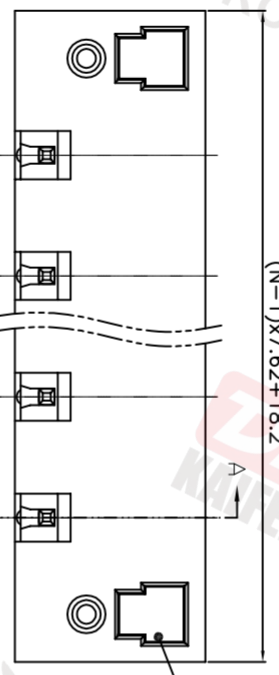



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.7.25	ZHANG	JIN

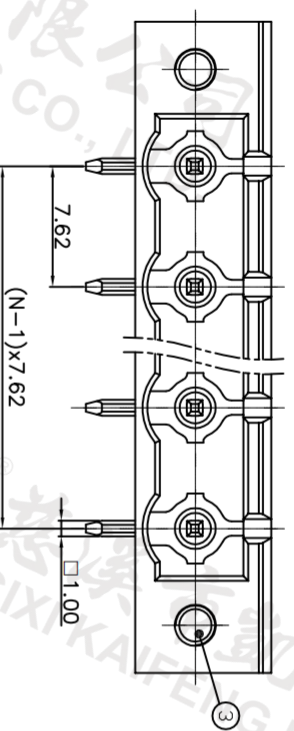


- Material  
 ØHousing : PA66, UL94V-0  
 ØPin header : Copper alloy, Tin plated  
 ØNut : M2.5,steel, Zinc plated  
 ØPlug : PA66, UL94V-0

- Electrical UL IEC  
 Rated voltage : 300V 400V  
 Rated current : 15A 20A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC3500V/1min

- Mechanical  
 Operating temperature: -40°C~+105°C  
 Soldering temperature:250°C±5/5sec

• Conform to REACH and RoHS

HOW TO ORDER  
 KF2EDGRM-X-7.62-XXP-1 X-XXXXX

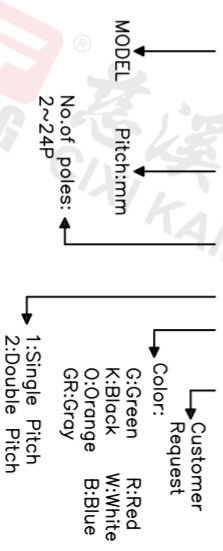

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>10	0.1/10
>6	>30	
~	~	
6	24	
~	~	
10	30	
~	~	
24	60	
~	~	
±0.15	±0.30	±2°
±0.20	±0.30	
±0.30	±0.50	
±0.70	±1.00	
±1.30	±1.30	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1/1
DRAWING NO.	W10004762

PROJECTION	TITLE
UNIT	mm
SHEET SIZE	A4
SERIES	KF2EDGRM-X
MODEL	KF2EDGRM-X-7.62-XXP-1X-001H

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD