

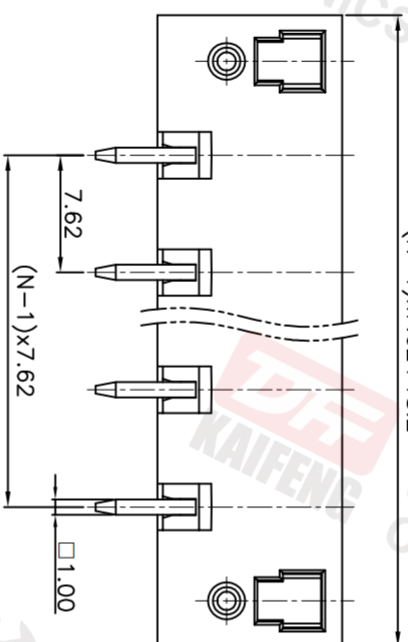
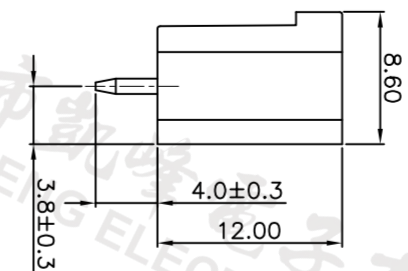


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.8.28	ZHANG	JIN

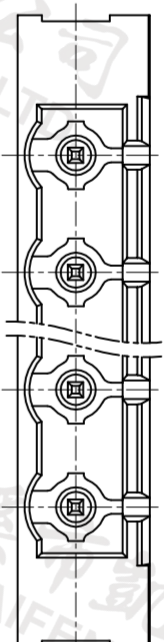

- Material
①Housing : PA66, UL94V-0
②Pin header : Copper alloy, Tin plated

- Electrical
UL IEC
Rated voltage : 300V 400V
Rated current : 15A 20A
Contact resistance : 20mΩ(Max)
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC3000V/1min


- Mechanical
Operating temperature: -40℃~+105℃
Soldering temperature: 250℃±5/5sec

- Conform to REACH and RoHS

HOW TO ORDER
KF2EDGV-X-7.62-XXP-1 X-XXXXX

MODEL Pitch:mm
No.of poles: 2~24P
Color: Customer Request
G:Green R:Red
K:Black W:White
O:Orange B:Blue
GR:Grey

P.C.B.LAYOUT

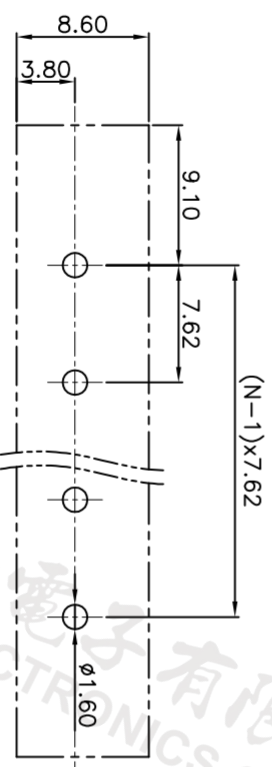

Pitch range		Nominal dimension range							PROJECTION		TITLE
>0	>6	>10	>0	>30	>60	>100		0.1/10	UNIT	mm	KF2EDGV-X-7.62-XXP-1X-001F
6	10	24	30	60	100	150	>150	∠	SHEET SIZE	A4	SERIES KF2EDGV-X
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			
DRAWING TYPE		CUSTOMER DRAWING									
SCALE		1:1		SHEET		1/1					
DRAWING NO.		W10005182									



慈溪市凯峰电子有限公司
CXI KAI FENG ELECTRONICS CO.,LTD

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD