


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.7.17	ZHANG	JIN

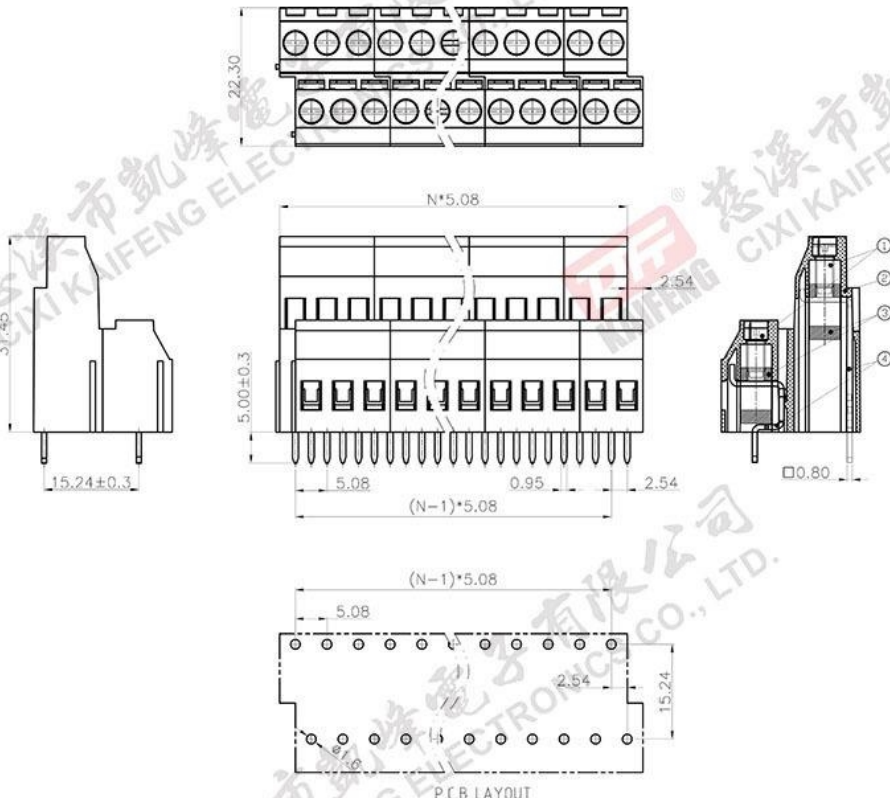


- Material
 - ØScrew : M3.0 steel, Zinc plated,
 - *-slot type
 - ØHousing : PA66, UL94V-0
 - ØClamp : Copper alloy, Ni plated
 - ØPin header : Copper alloy, Tin plated

- Electrical
 - Rated voltage : 300V
 - Rated current : 25A
 - Contact Resistance: 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 24-12AWG 4.0mm²

- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 0.5N.m (4.43Lb.in)
 - Strip length: 6-7mm

• Conform to REACH and RoHS

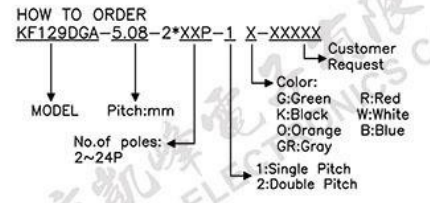

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	0.1/10	mm	KF129DGA-5.08-2*XXP-1X
~6	~30		A4	SERIES KF129DGA
~10	~60			
~24	~100			
±0.15	±0.50			
±0.20	±0.70			
±0.30	±1.00			
±0.30	±1.30			
	±2°			
DRAWING TYPE		CUSTOMER DRAWING		
SCALE		1:1 SHEET 1/1		
DRAWING NO.		W15002432		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD