
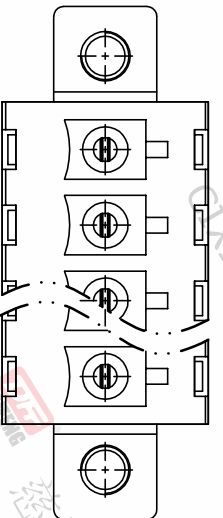
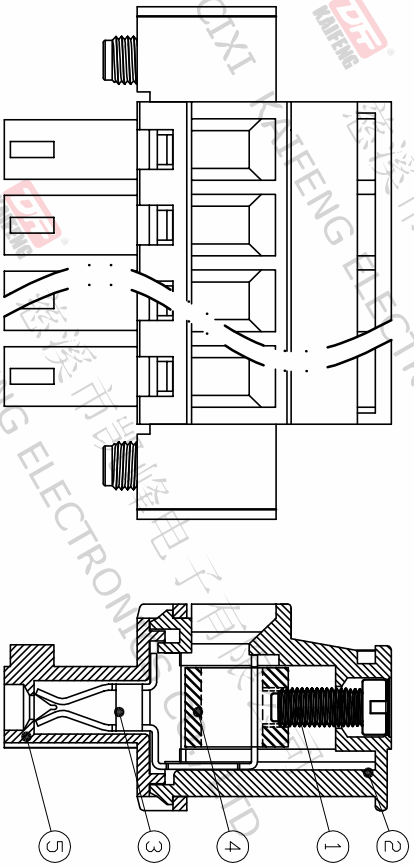


版本	修订内容	日期	绘图	批准
A1	DWG.REL	2020/5/18	张智美	金正发

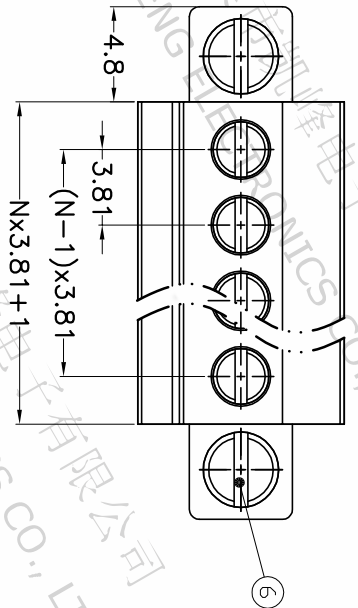

- 材质及电镀
 - ① 螺 丝: M2.0, 钢, 镀锌, “—” 字槽
 - ② 塑件主体: PA66, UL94V-0
 - ③ 夹 子: 铜合金, 镀锡
 - ④ 方 盒: 铜合金, 镀镍
 - ⑤ 塑件盖板: PA66, UL94V-0
 - ⑥ 螺 丝: M2.5, 钢, 镀锌, “—” 字槽

- 电气性能

参考标准: UL IEC

额定电压: 300V 250V

额定电流: 8A 7A

接触电阻: 20mΩ(Max)

绝缘电阻: 500MΩ/DC500V

耐电 压: AC1500V\DC500V

使用线径: 28-16AWG 0.5-1.5mm²

- 机械性能

温度范围: -40℃~+105℃


瞬时温度: +250℃ 5秒

扭 力: 0.2N.m(2.04kgf.cm)

剥线长度: 6-7mm

订购方式 符合RoHS环保要求

KF12EKAM-3.81-XXP-1 X-XXXXX

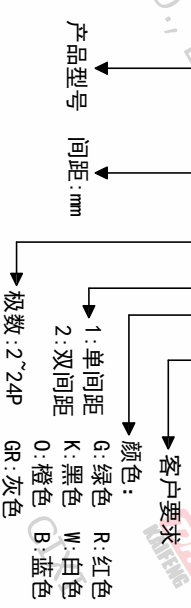

间距尺寸公差	其它未注尺寸公差	1	2	3	4	5
>0 ~ 6	>0 ~ 30	±0.15	±0.20	±0.30	±0.50	±0.70
6 ~ 10	30 ~ 60	±0.20	±0.30	±0.50	±0.70	±1.00
>10 ~ 24	60 ~ 100	±0.30	±0.50	±0.70	±1.00	±1.30
>24 ~ 30	100 ~ 150	±0.50	±0.70	±1.00	±1.30	±2.0
>30 ~ 60	>150	±0.70	±1.00	±1.30	±2.0	±3.0
>60 ~ 100		±1.00	±1.30	±2.0	±3.0	±4.0
>100 ~ 150		±1.30	±2.0	±3.0	±4.0	±5.0
>150 ~ 200		±2.0	±3.0	±4.0	±5.0	±6.0
>200 ~ 250		±3.0	±4.0	±5.0	±6.0	±7.0
>250 ~ 300		±4.0	±5.0	±6.0	±7.0	±8.0
>300 ~ 350		±5.0	±6.0	±7.0	±8.0	±9.0
>350 ~ 400		±6.0	±7.0	±8.0	±9.0	±10.0
>400 ~ 450		±7.0	±8.0	±9.0	±10.0	±11.0
>450 ~ 500		±8.0	±9.0	±10.0	±11.0	±12.0
>500 ~ 550		±9.0	±10.0	±11.0	±12.0	±13.0
>550 ~ 600		±10.0	±11.0	±12.0	±13.0	±14.0
>600 ~ 650		±11.0	±12.0	±13.0	±14.0	±15.0
>650 ~ 700		±12.0	±13.0	±14.0	±15.0	±16.0
>700 ~ 750		±13.0	±14.0	±15.0	±16.0	±17.0
>750 ~ 800		±14.0	±15.0	±16.0	±17.0	±18.0
>800 ~ 850		±15.0	±16.0	±17.0	±18.0	±19.0
>850 ~ 900		±16.0	±17.0	±18.0	±19.0	±20.0
>900 ~ 950		±17.0	±18.0	±19.0	±20.0	±21.0
>950 ~ 1000		±18.0	±19.0	±20.0	±21.0	±22.0

投影法	单位名称	品名
第一角	mm	KF12EKAM-3.81-XXP-1X
纸张尺寸	产品系列	产品系列
A4	KF12EKAM	KF12EKAM

图纸类型	客户图纸	图页	图页
比例	1:1	1/1	1/1
图纸编号	W10001491		

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD