
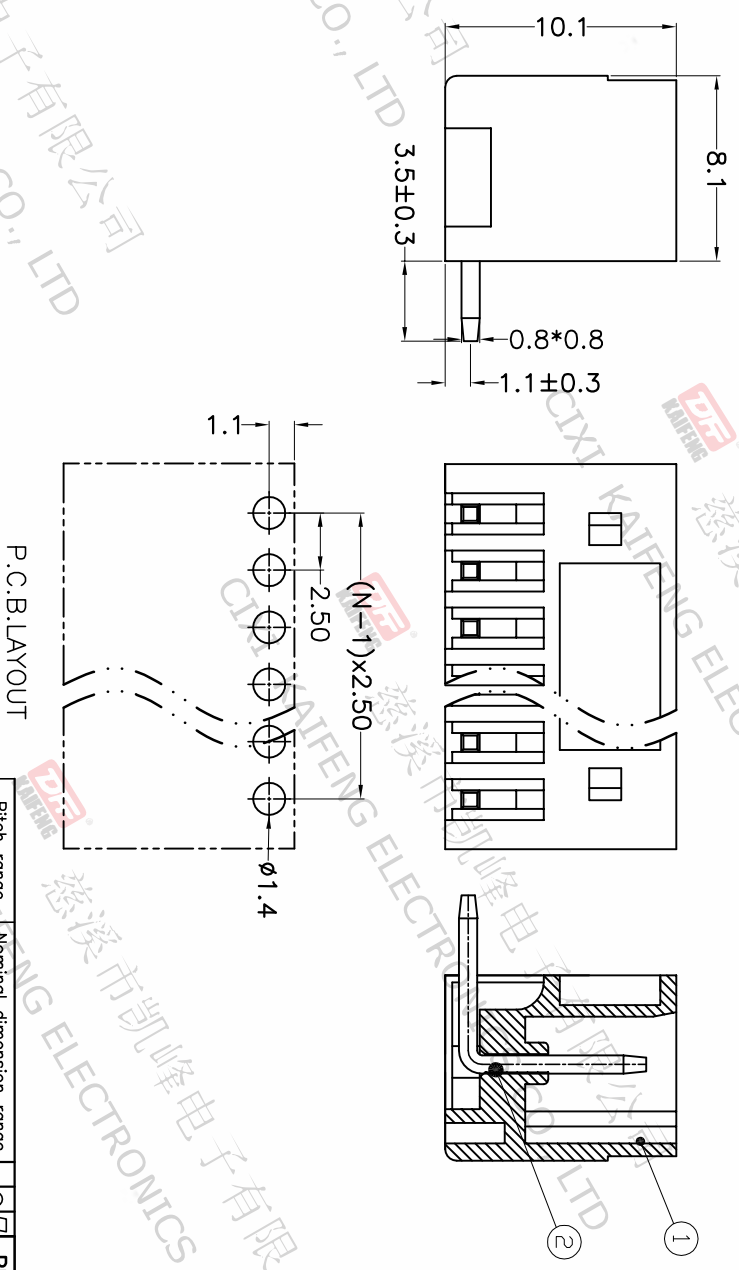


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

- Material  
 ①Housing : PA66, UL94V-0  
 ②Pin header : Copper alloy, Tin plated
- Electrical  
 UL IEC  
 Rated voltage : 150V 130V  
 Rated current : 5A 10A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC1250V/1min
- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec
- RoHS compliance

HOW TO ORDER  
 KF12EZR-2.5-XXP-1 X-XXXXX

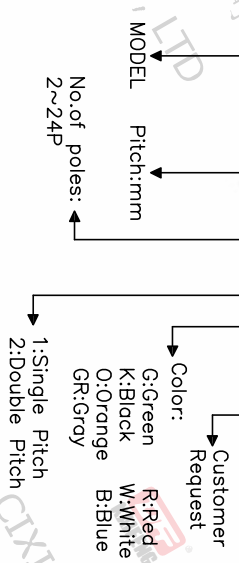

P.C.B. LAYOUT

Pitch range	Nominal dimension range	0.1/10
>0	>6	~
>6	>10	~
~	~	~
6	10	~
~	~	~
10	24	~
~	~	~
24	30	~
~	~	~
30	60	~
~	~	~
60	100	~
~	~	~
100	150	~
~	~	~
150	>150	~
~	~	~
>150	>150	~
±0.15	±0.20	±0.30
±0.30	±0.30	±0.50
±0.50	±0.70	±1.00
±1.00	±1.30	±2*

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10001502

PROJECTION	UNIT	TITLE
UNIT	mm	KF12EZR-2.5-XXP-1X
SHEET SIZE	A4	SERIES KF12EZR

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD