

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

- Material
 - ①Housing: PA66, UL94V-0
 - ②Plastic cover: PA66, UL94V-0
 - ③Clip: Copper alloy, Silver plating
 - ④Reed: Stainless steel

- Electrical

UL	IEC
Rated Voltage: 300V	630V
Rated Current: 15A	16A
Contact Resistance: 20mΩ	
Insulation Resistance: 500MΩ/DC500V	
Withstanding Voltage: AC1500V/1Min	
Wire range: 28-12AWG	0.2-2.5mm ²

- Mechanical




Temperature Range: -30℃~+105℃

MAX Soldering: +250℃,(5 Seconds)

• RoHS compliance

HOW TO ORDER

KF4751-7.5-XXP-1 X-XXXXX

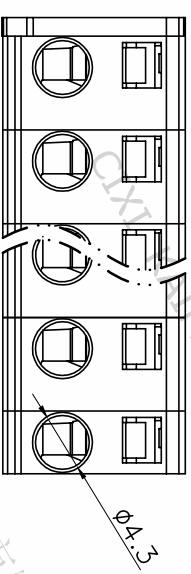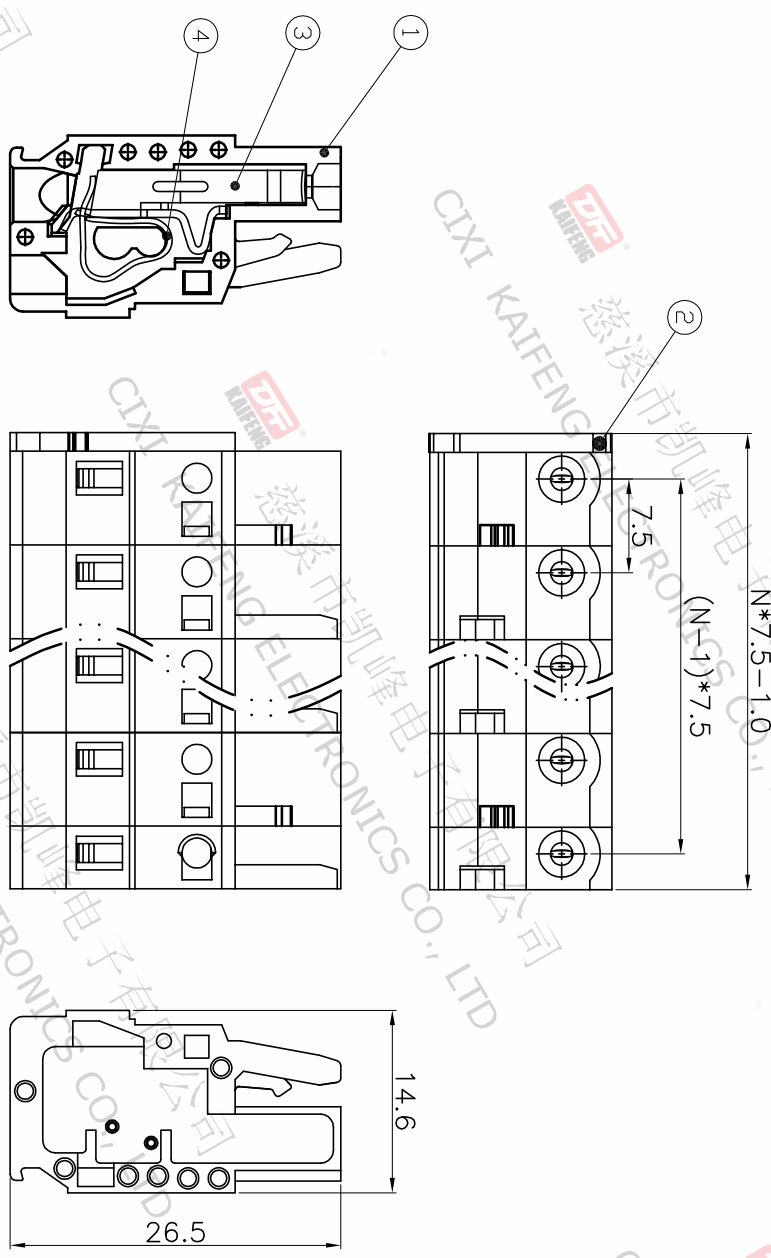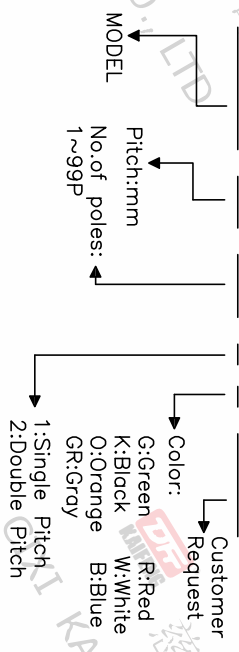

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>30	□	mm
~6	~60	□	mm
~10	~100	□	mm
~24	~150	□	mm
±0.15	±0.30	□	mm
±0.20	±0.30	□	mm
±0.30	±0.50	□	mm
±0.70	±1.00	□	mm
±1.30	±1.30	□	mm
		□	mm

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W16000172		
TITLE	KF4751-7.5-XXP-1X		
SHEET SIZE	A4		
SERIES	KF4751		

DFE 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD