


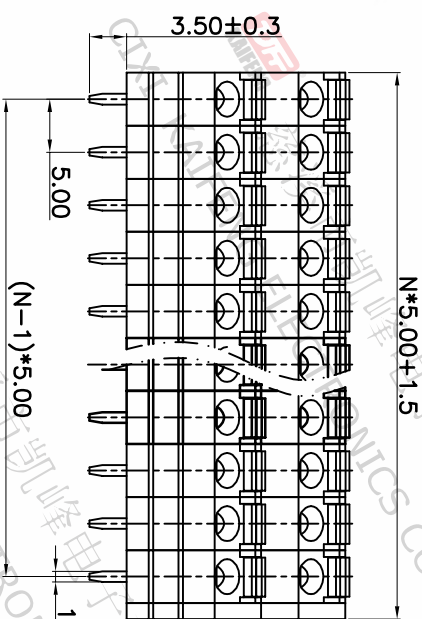


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.28	DENG	JIN

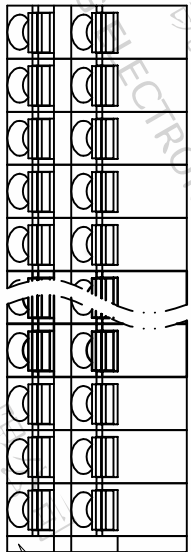


- Material
 - ØHousing : PA66, UL94V-0
 - ØCover : PA66, UL94V-0
 - ØButton : PA66, UL94V-0
 - ØReed : Stainless steel
 - ØPin header: Copper alloy, Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 10A 17.5A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range : 26-16AWG 1.5mm²
- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C±5/5sec
 - Strip length: 9-10mm
- RoHS compliance

HOW TO ORDER
KF550H-5.0-2*XXP-1 X-XXXXX

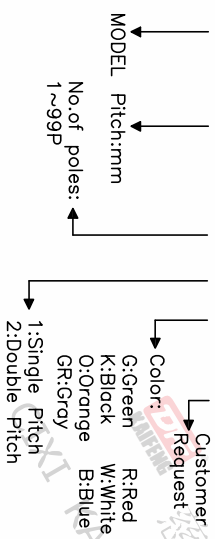

P.C.B.LAYOUT

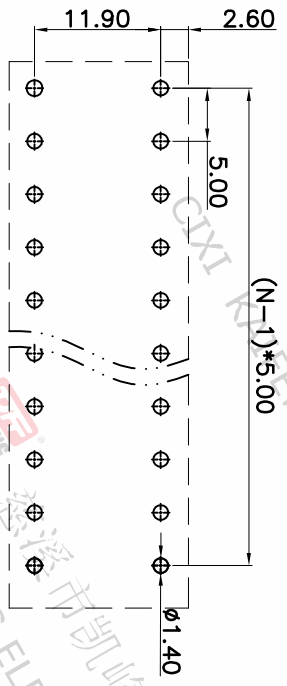

Pitch range	Nominal dimension range	Projection	UNIT
>0	>0	0.1/10	mm
>6	>30		
~10	~60		
~24	~100		
~30	~150		
±0.15	±0.30	±2°	
±0.20	±0.30		
±0.30	±0.50		
±0.70	±1.00		
±1.30	±1.30		

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

DRAWING TYPE: CUSTOMER DRAWING
SCALE: 1:1 SHEET: 1 OF 1
DRAWING NO.: W15000342

TITLE: KF550H-5.0-2*XXP-1X
SHEET SIZE: A4
SERIES: KF550