
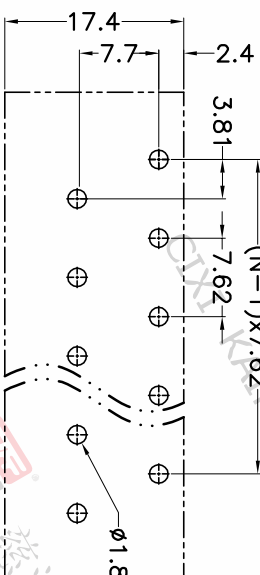
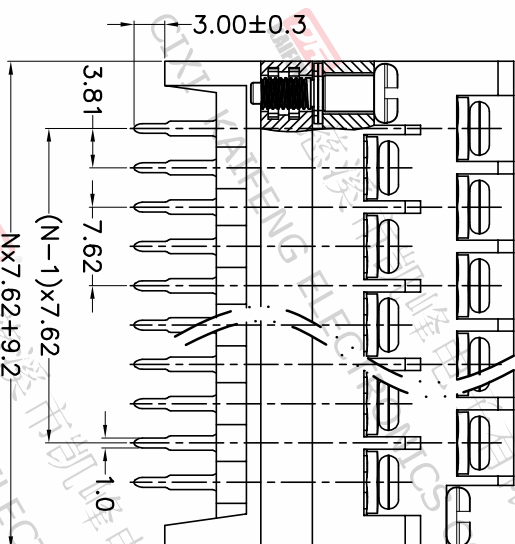
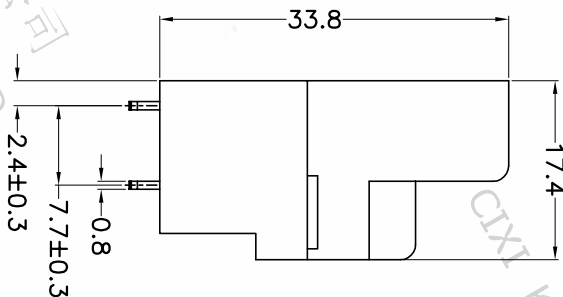
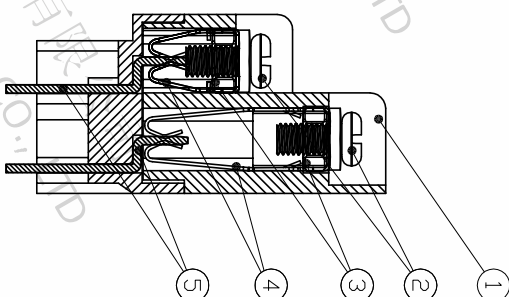


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.22	LIUZH	JIN

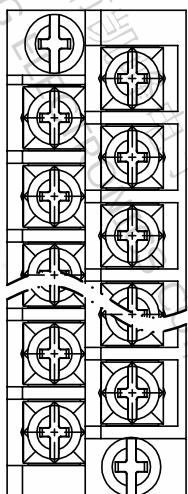


P.C.B.LAYOUT

Pitch range	Nominal dimension range	0.1/10	0.1/10
>0	>10	>0	>100
~	~	~	~
6	10	24	30
±0.15	±0.20	±0.30	±0.50
±0.30	±0.70	±1.00	±1.30
±2°			

DRAWING TYPE	CUSTOMER DRAWING	SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W12001072				

- Material
 - ①Housing : PA66,UL94V-0
 - ②Screws : M3.0 steel, Ni plated
 - ③Nut : Steel, Ni plated
 - ④Contact : Phosphor bronze, Ni plated
 - ⑤Terminal : Brass, Tin plated
- Electrical IEC
 - Rated voltage : 300V 450V
 - Rated current : 20A 24A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range : 22-12AWG 4.0mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 0.5N.m (4.43lb.in)
- RoHS compliance

HOW TO ORDER
KF-762B-7.62-2*XXP-1 X-XXXXX

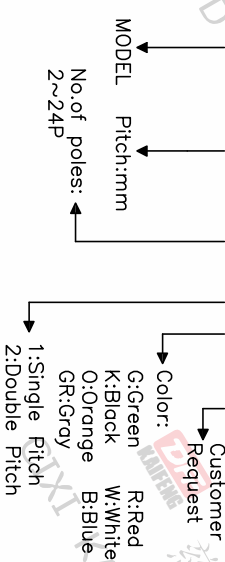

KF-762B-7.62-2*XXP-1X

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD